



BRNO THERMO


Heat Insulated Sliding Systems




technical • prices • parts • profiles • properties • photos

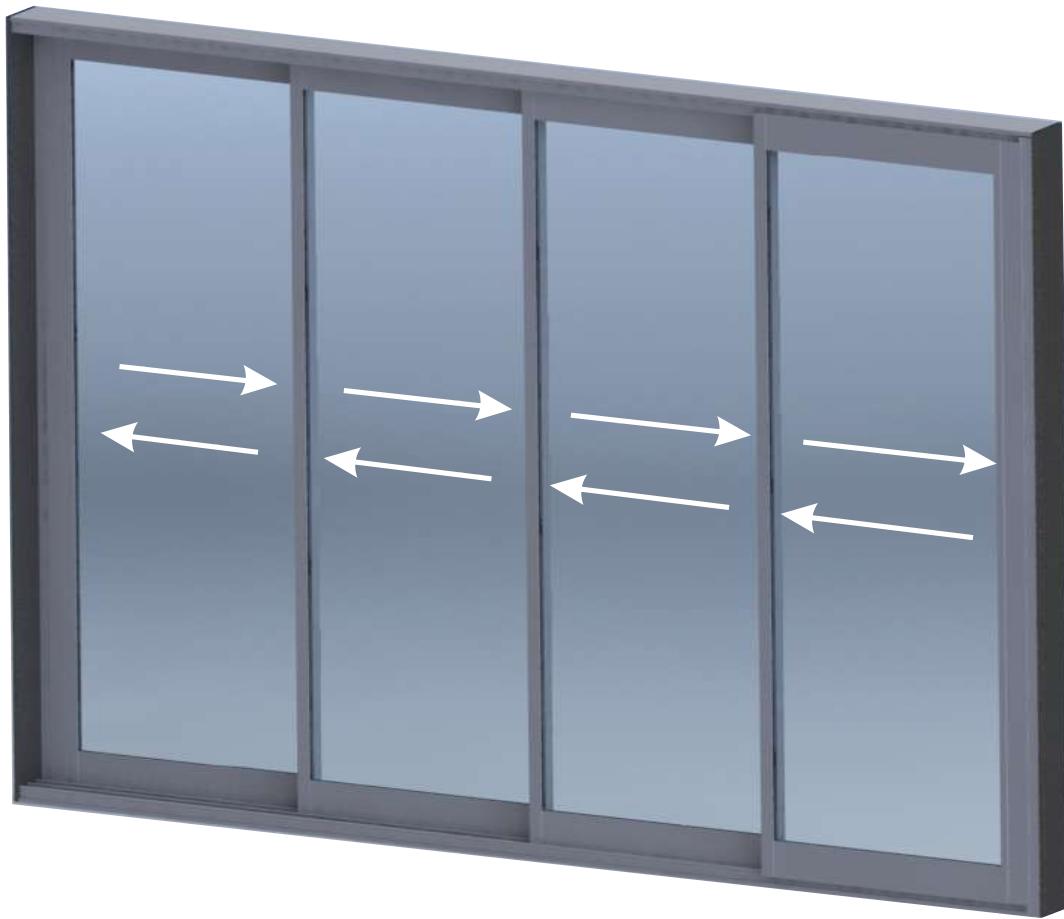

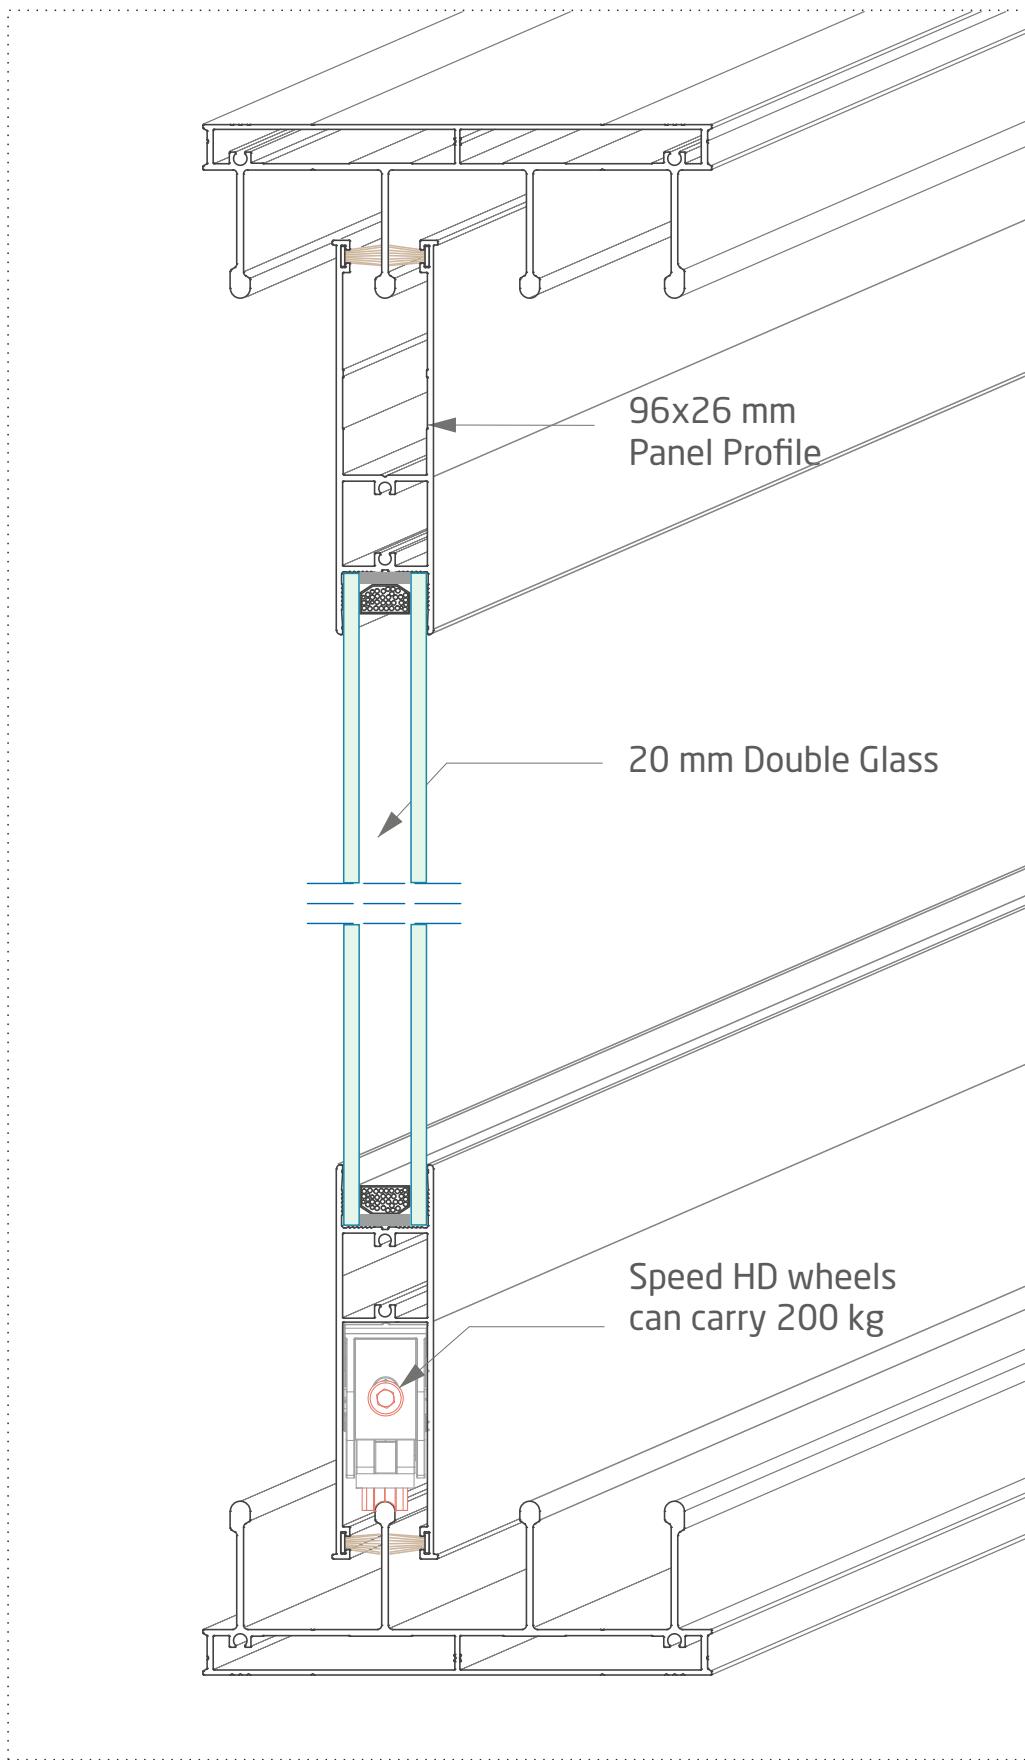


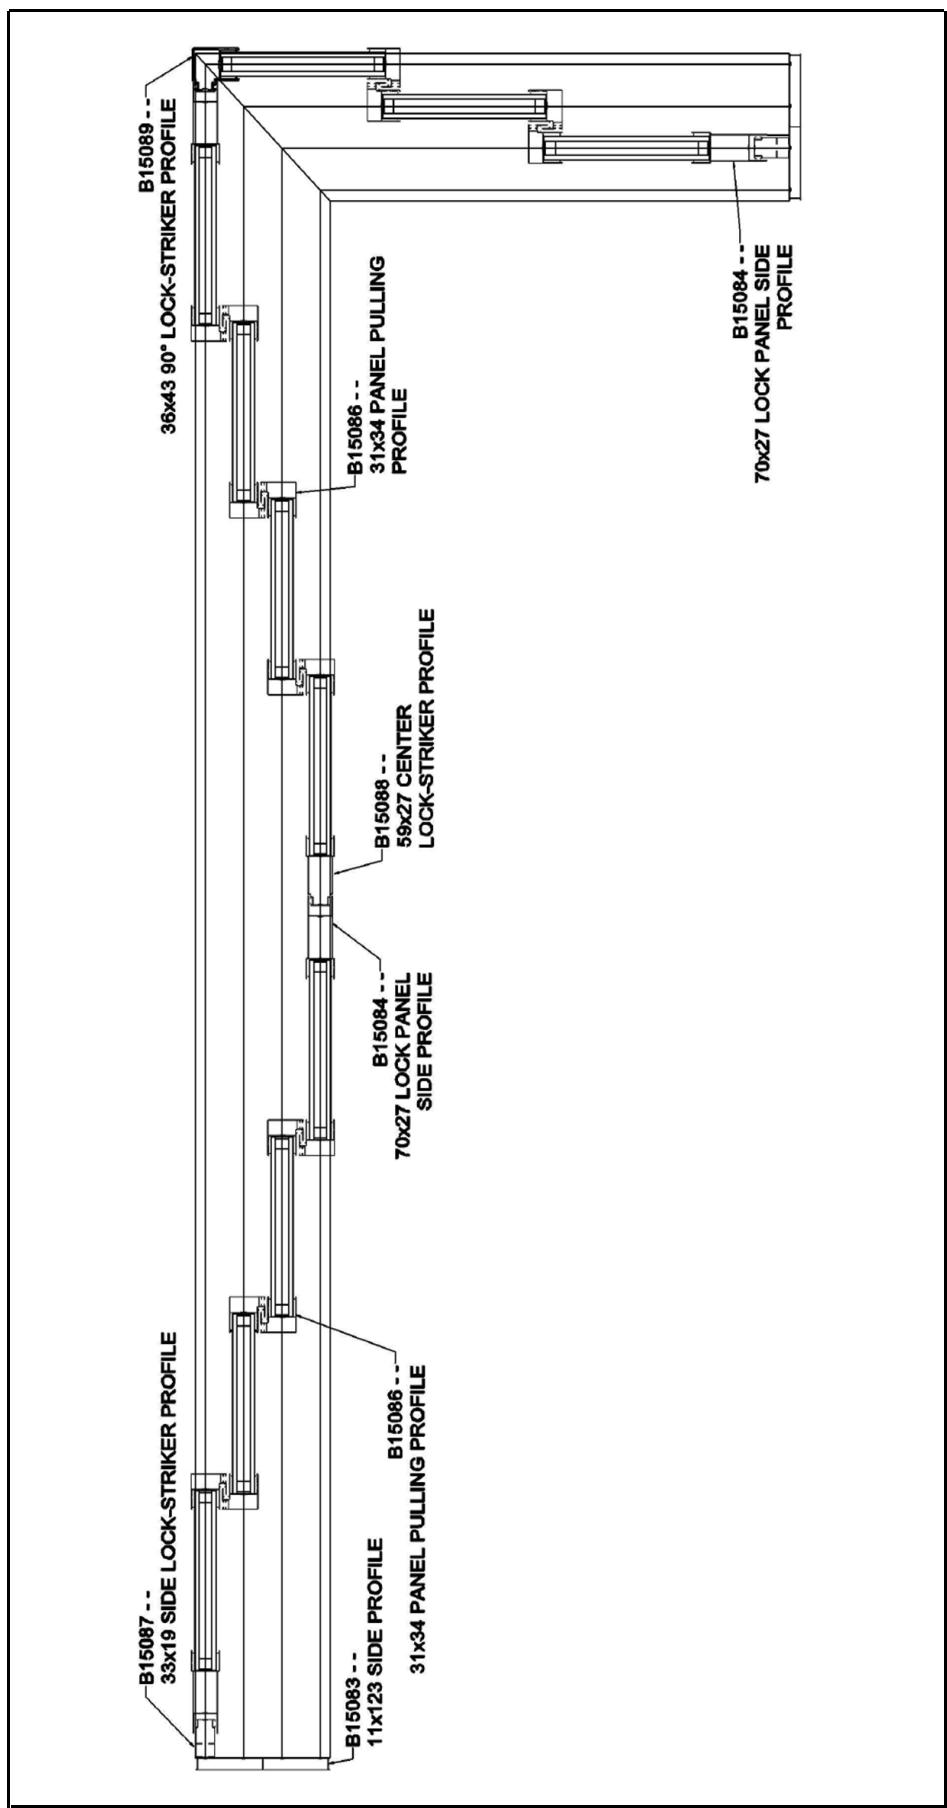

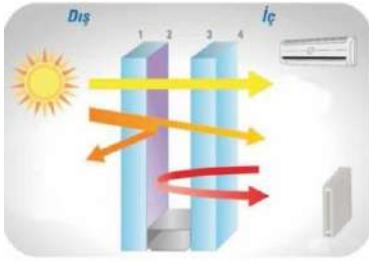

Four Times Insulation

Heat insulated version of the SlideMaster provides 4.3 times more insulation than a single glass due to the double glass option used in it. So you will experience cooler summers and warmer winters.

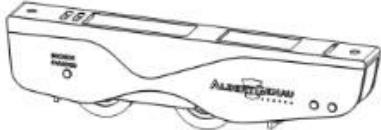

3D Isolation

Brno thermo system uses isolation brushes between Rail and Panel profile, around the Rail profiles and side profiles used at the end of systems for much better and higher isolation.


Perpetual Motion

Brno uses unique design Speed- HD wheels which are patented . Wheels have stainless steel bearing, have adjustable height option and absorb shocks. All the panels move comfortably with the minimum noise and friction.




Stainless Steel Hardware System

Bearings and other hardware parts of is under the guarantee of Keraglass as it is for Stainless Steel.




Endless Rail System

The special design of Brno thermo allows endless rail application. Keraglass designed extra rail profile which is added perfectly to sides of rail profiles. There is no limit for addition so it is totally endless.




3 Different Types of Glass

System can be used in 3 different glass thicknesses which are 4+12+4 heat insulated, 8 mm and 10 mm. The choice of the glass thickness depends of the preference and characteristics of the project.



Operation of with and without threshold

SlideMaster can be applied with or without threshold version. Threshold version has 42 mm height and without threshold has a 15 mm thickness. Perfect solution for HoReCA places.

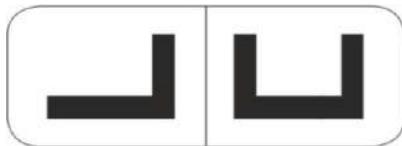

No barriers at the corners

Keraglass designed special panel profiles for L and U projects. Balconies can be completely opened without the usage of any fixed side profiles. This allows perfect wideness and panoramic view for L and U projects.



Maximum Panoramic View

System allows a panoramic view due to its 1.5m wide side panels. These panels can be closed / opened comfortably with the help of advanced wheel parts.




Safety Lock System Options

You can choose among the variations of lock system since it is a Brno feature to design your safety need.



Easy Cleaning Inside & Outside

Brno thermo special design allows all panels move individually so all panels can be cleaned 100 %.



Special Water Drainage System

The extra rail which enables infinitive rails to the system, works as water drainage system at bottom part. So the amount of water that possibly would enter will be collected in water discharge unit under the bottom rail profile and will be drained by discharge holes.



Soft Touch- Non Dirt Surface

Brno system is designed and dyed in special gilded, dirt-free ESPC paint. This adds the system a shining and easier cleaning surface compared to standard anthracite RAL color.



Curtain Blind – Shutter – Fly Screen

Curtain Blind/Shutter or fly screen can be integrated at the outmost rail which will allow you to control sunlight or mosquito entering inside your system.



