

Rolling Center R-1000


Nuovo sistema scorrevole con ruote a terra e guida a pavimento.
- montaggio a parete o a soffitto - possibilità di avere 1 o 2 vie - spessore vetro da 10 a 13,5 mm

*New sliding system with visible rollers running on the floor guide.
- wall or ceiling installation - available 1 or 2 ways - glass thickness from 10 to 13,5 mm Available with 1 or 2 ways.*




*Neues Schiebetürsystem mit frei sichtbaren Rollen am Boden und Bodenführung.
- Wand-, Deckenmontage - Lieferbar 1 bzw 2 läufig - Glasdicke von 10 bis 13,5 mm*





R-1000 set 1



R-1000 set 2

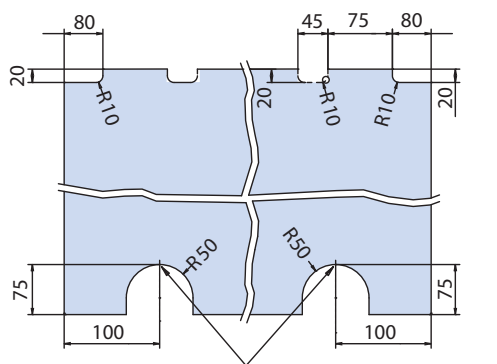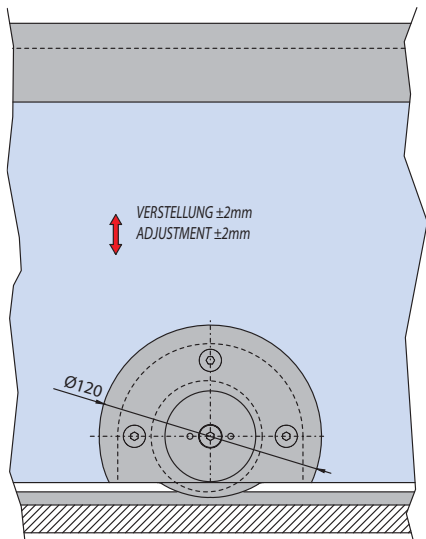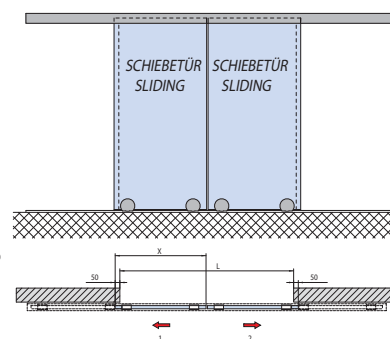

Montaggio a parete o soffitto
Ceiling or wall installation
Decken- bzw. Wandmontage

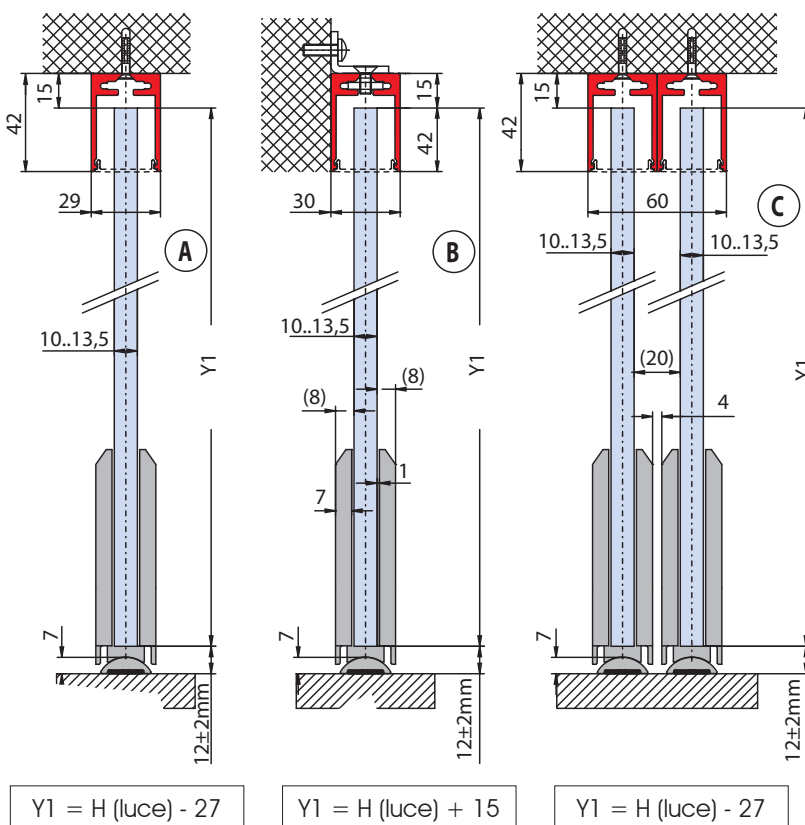

$Y1 = H(\text{luce}) - 27$

$Y1 = H(\text{luce}) + 15$

$Y1 = H(\text{luce}) - 27$

Effetto inox
Inox effect
Inox effekt

Rolling Center R-1000

