



SlideTec optima 150 Ceiling Mounting



Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

i Mounting: Ceiling Mounting · Version single door · Door weight max. 150 kg · Glass thickness tempered glass 8 - 12 mm · Glass thickness laminated safety glass 8.76 - 12.76 mm · Material: Aluminium


Included in delivery:

2 items Roller units incl. clamps

2 items Stoppers

1 item Running track, ceiling mounting incl. cover

1 item Bottom guide (when using 12.76 mm laminated safety glass, please request special guide)

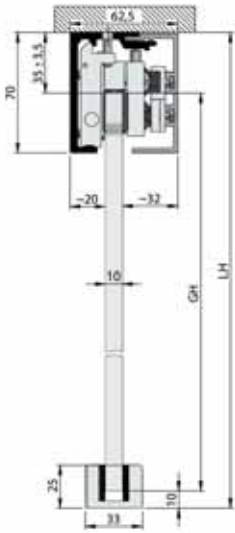

Art. No.	Length · Finish
BO 5101551	2000 mm · Aluminium EV1
BO 5101553	2500 mm · Aluminium EV1
BO 5101555	3000 mm · Aluminium EV1
BO 5101557	2000 mm · stainless steel look
BO 5101559	2500 mm · stainless steel look
BO 5101561	3000 mm · stainless steel look



SlideTec optima 150 Wall Mounting



Further track lengths on request · BH = Drilling Height · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

i Mounting: Wall Mounting · Version single door · Door weight max. 150 kg · Glass thickness tempered glass 8 - 12 mm · Glass thickness laminated safety glass 8.76 - 12.76 mm · Material: Aluminium


Included in delivery:

2 items Roller units incl. clamps


2 items Stoppers

1 item Running track, wall mounting incl. cover

1 item Bottom guide (when using 12.76 mm laminated safety glass, please request special guide)

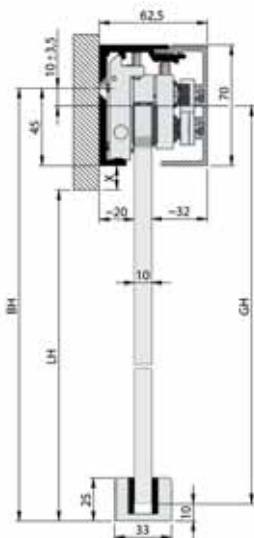

Art. No.	Length · Finish
BO 5101552	2000 mm · Aluminium EV1
BO 5101554	2500 mm · Aluminium EV1
BO 5101556	3000 mm · Aluminium EV1
BO 5101558	2000 mm · stainless steel look
BO 5101560	2500 mm · stainless steel look
BO 5101562	3000 mm · stainless steel look

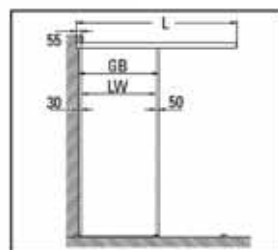



SlideTec optima 150 Ceiling Mounting with Fixed Glazing



Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track · S = Sidelight Width · T = Cover Profile

i Mounting: Ceiling Mounting · Version single door with fixed glazing · Door weight max. 150 kg · Glass thickness tempered glass 8 - 12 mm · Glass thickness laminated safety glass 8.76 - 12.76 mm · Material: Aluminium

Included in delivery:



2 items Roller units incl. clamps

2 items Stoppers

1 item Running track, ceiling mounting incl. cover


1 item Cover profile

1 item Bottom guide (when using 12.76 mm laminated safety glass, please request special guide)

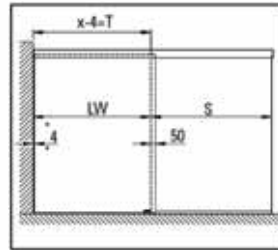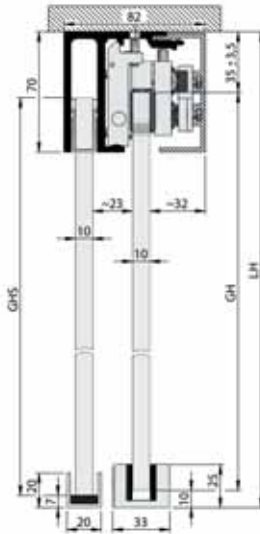

Art. No.	Length · Finish
BO 5101563	2000 mm · Aluminium EV1
BO 5101564	2500 mm · Aluminium EV1
BO 5101565	3000 mm · Aluminium EV1
BO 5101566	2000 mm · stainless steel look
BO 5101567	2500 mm · stainless steel look
BO 5101568	3000 mm · stainless steel look

1. Running track (with and without sidelight)
2. Cover
3. End caps (not included in delivery)
4. Roller unit
5. End stop left
6. End stop right
7. Bottom guide
8. Bottom stop buffer (not included in delivery)



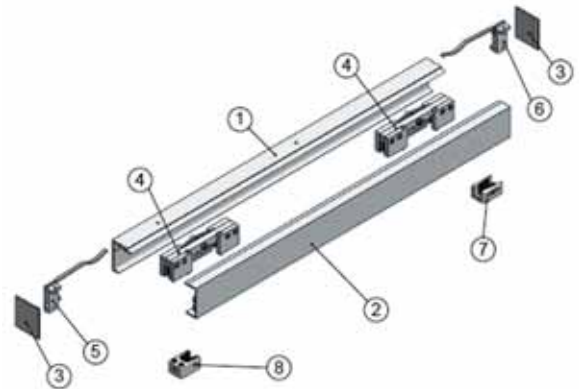


Damping Mechanism SlideTec optima 150




i Version damping mechanism on both sides (starting from August 2012 without glass processing)

Art. No.	Weight
BO 5101571	max. 80 kg
BO 5101572	max. 150 kg

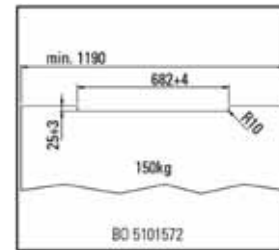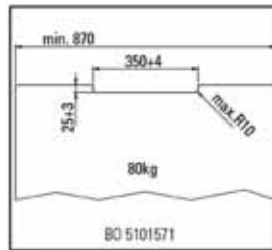

Supplementary Set SlideTec optima 150 double doors

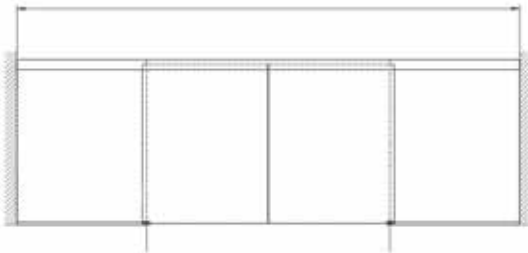

i Glass thickness 8 - 12.76 mm · Material: Aluminium · Version double doors

- Included in delivery:**
 2 items Roller units incl. ball bearing
 2 items Stoppers
 1 item Bottom guide

Art. No.	Finish
BO 5101573	Aluminium EV 1
BO 5101574	stainless steel look

▶ End Cap without Fixed Glazing ✦



i Material: Aluminium

Art. No.	Finish
BO 5101547	stainless steel look
BO 5101550	Aluminium EV1

▶ End Cap with Fixed Glazing ✦



i Material: Aluminium


Art. No.	Finish
BO 5101548	stainless steel look
BO 5101549	Aluminium EV1

▶ Synchronous Converter ✦



Complete accessory set for a synchronous double door system


Art. No.
BO 5101575

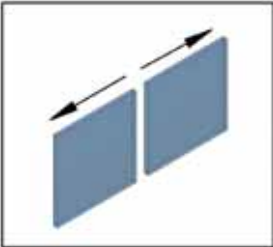

▶ U-Shaped Guide Track Fixed Glazing ✦



i Glass thickness tempered glass 8 - 12 mm · Glass thickness laminated safety glass 8.76 - 12.76 mm · Length 2500 mm · Material: Aluminium

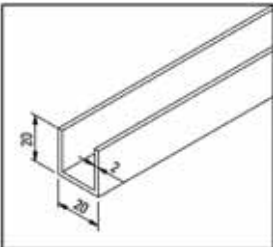

Art. No.	Finish
BO 5101576	Aluminium EV 1
BO 5101577	stainless steel look